

TWIN SPHERE RUBBER JOINT WITH FLANGES




Specification:

Cover	: Neoprene rubber
Tube	: Neoprene rubber
Flange	: ANSI, JIS, And Special Specification
Reinforcement	: High quality synthetic fabric

Operating Condition:

Vacuum Rating	: 400 mm Hg
Temperature	: -20°C to 115°C
Fluids	: Water, Hot water, Sea Water
	: Weak acids, Compressed air

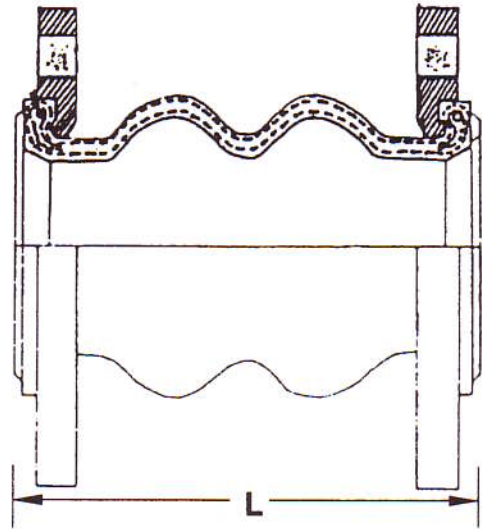

TYPE

SSF

Twin-Sphere Connectors with Flanges

Nominal Diameter		Neutral Length (L) mm	Allowable Movement From Neutral Axial		Lateral +/- mm	Angular +/- degree	Pressure		Weight Kg
inch	mm		Compression mm	Extension mm			Bar	PSI	
2	50	165	50	30	45	40	12	176	3.9
2.1/2	65	175	50	30	45	40	12	176	4.8
3	80	175	50	30	45	40	12	176	6.4
4	100	225	50	35	40	35	12	176	8
5	125	225	50	35	40	35	12	176	10
6	150	225	50	35	40	35	12	176	13
8	200	325	60	35	35	30	12	176	18
10	250	325	60	35	35	30	12	176	25
12	300	325	60	35	35	30	12	176	39